



ProXL

A solid colored, dual layer, marble accent rubber flooring tile. ProXL's slip-resistant, textured top wear layer provides a non-porous, safe and resilient floor finish. ProXL is a great fit for weight rooms, ice rinks, fitness centers or home gyms.




Technical Specifications

Hardness Shore A	ASTM D2240	Top 82, Bottom 70
Co-efficient of Friction	ASTM C1028	0.93 dry, 0.84 wet
Critical Radiant Flux	ASTM E648-03	Class 1, 0.92 watts/cm ²
Static Load Limit	ASTM F970-00	0.005 @ 500 psi
Optical Density of Smoke	ASTM E662	< 450 Pass
VOC Compliance	ASTM D5116	Yes
Color Stability		Average
Light Reflection		Average
Resistance to Chemicals		Good
Contributes to LEED Points		Yes

Size Specifications

Wear Surface				100% virgin rubber		
Base Layer				Recycled SBR rubber		
Thickness	Dimension	Weight	Area	Interlock	Weight	Area
6mm	900mm x 900mm (35.5" x 35.5")	17 lbs.	8.75 sq. ft.	33.4" x 33.4"	15 lbs.	7.75 sq. ft.
8mm		23 lbs.	8.75 sq. ft.	33.4" x 33.4"	20 lbs.	7.75 sq. ft.
10mm		28 lbs.	8.75 sq. ft.	33.4" x 33.4"	25 lbs.	7.75 sq. ft.

Standard Colors

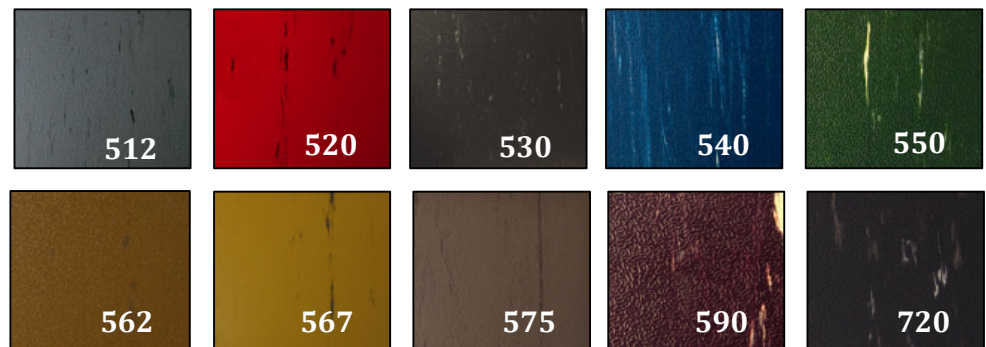

We can create a unique statement to re-inforce your corporate identity by custom cutting your logo.

Colors: with 10% accent marbling – Colors will be matched to within ± one tone on the pantone chart
512 Mid Grey/Black **520** Red/Black **530** Black/Tan **540** Dark Blue/Tan **550** Forrest Green/Tan **562** Espresso/Black
567 Sand/Chocolate **575** Putty/Chocolate **590** Plum/Tan **720** Earth tone/Black with mixed

Finishes: Matte