

ReAction:

ReAction is manufactured in a dual layer format. The top layer consists of colored virgin blend rubber with 20% fine speckle accent granules. ReAction is a very durable, versatile and attractive flooring option. It's a great fit for weight rooms, ice rinks, fitness centers or home gyms.




Technical Specifications

Hardness Shore A	ASTM D2240	Top 82, Bottom 70
Co-efficient of Friction	ASTM C1028	0.93 dry, 0.84 wet
Critical Radiant Flux	ASTM E648-03	Class 1, 0.92 watts/cm ²
Static Load Limit	ASTM F970-00	0.005 @ 500 psi
Optical Density of Smoke	ASTM E662	< 450 Pass
VOC Compliance	ASTM D5116	Yes
Color Stability		Average
Light Reflection		Average
Resistance to Chemicals		Good
Contributes to LEED Points		Yes

Size Specifications

Wear Surface				100% virgin rubber		
Base Layer				Recycled SBR rubber		
Thickness	Dimension	Weight	Area	Interlock	Weight	Area
6mm	1 m x 1 m (39.4" x 39.4")	18 lbs.	10.76 sq. ft.	.9454 m (37.22")	16 lbs.	9.6 sq. ft.
8mm		24 lbs.	10.76 sq. ft.	.9454 m (37.22")	21 lbs.	9.6 sq. ft.
10mm		29 lbs.	10.76 sq. ft.	.9454 m (37.22")	29 lbs.	9.6 sq. ft.

Standard Colors

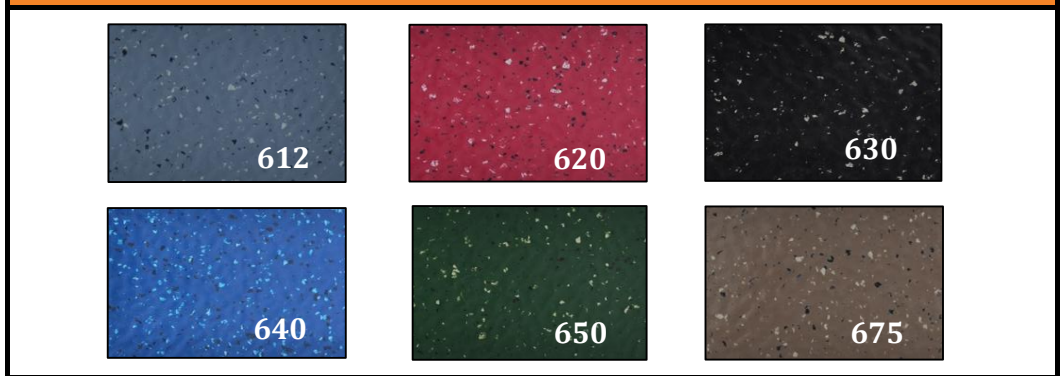

We can create a unique statement or re-inforce your corporate identity by custom cutting logos.

Colors: with 20% fine speckles added – Colors will be matched to within ± one tone on the pantone chart
612 Mid Grey with Black **620** Red with Black, Light Grey **630** Black with Light grey
640 Dark Blue with Black, Light Grey **650** Green with Black, Light Grey **675** Putty with Black, Light Grey

Finishes: Matte