




**25 YEAR
WARRANTY!**

PULASTIC PRO 110 COMFORT

A multi-purpose sports floor providing enhanced vertical deformation for increased COMFORT and SAFETY

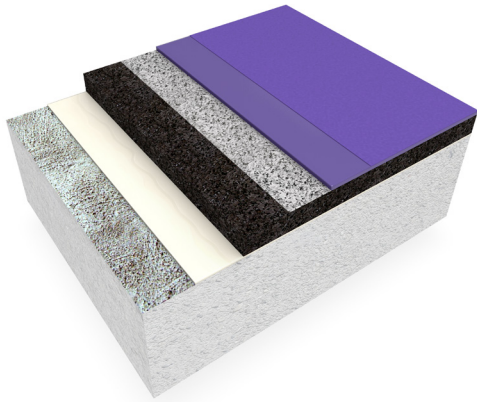

- Pulastic Pro Comfort 110 is approved according to the EN 14904 Standard - Category P1
- Approved by FIBA and IHF
- Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
- Enhanced comfort and point-elasticity
- Excellent resiliency for comfort and injury prevention
- Seamless, non-porous and smooth surface for easy maintenance
- Sustainability through high content of recycled and renewable raw materials
- Water based finish for very low odor during installation and maximum indoor clean air protection during use
- Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability



PULASTIC[®]
SPORTS FLOORING

SYNTHETIC FLOORING SYSTEMS

**PROVEN
Safety**

**PROVEN
Performance**

**PROVEN
Winners**

INDOOR | MULTI-PURPOSE | BASKETBALL | VOLLEYBALL
 AEROBICS | TRAINING FACILITY | COMPETITION LEVEL

Product Specifications

<i>Nominal Thickness</i>	11 mm		
<i>Character</i>	Point-Elastic		
<i>Shock Absorption</i>	32%	EN 14808	
<i>Vertical Deformation</i>	1.9 mm	EN 14809	
<i>Ball Bounce</i>	97%	EN 12235	
<i>Resistance to Rolling Load</i>	≥ 1500 N	EN 1569	
<i>Resistance to Impact</i>	≥ 800 gr @ 10°C	EN 1517	
	≥ 1200 gr @ 17°C	EN 1517	
<i>Resistance to Indentation</i>	0.35 mm @ 5 min	EN 1516	
	0.15 mm @ 24 hrs	EN 1516	
<i>V.O.C. Content- Adhesive</i>	Solvent Free		
<i>V.O.C. Content- Finish</i>	45 gr/lit	ASTM D 3960	
<i>Elongation at break- Structure</i>	200%	DIN 53455	
	<i>Tensile Strength- Structure</i>	10 N/mm ²	DIN 53455
	<i>Tear Strength- Structure</i>	25 N/mm	DIN 53515
<i>Warranty</i>	25 YEAR manufacturer's warranty		

16 Classic Colors to Choose From



*Custom color options available. Due to printer variation, actual floor colors may be slightly different from colors above. Consult your dealer for color accuracy.

Pro 110 Comfort Meets the Following Organizational Approvals



robbinsfloor.com | 1.800.543.1913