


PULASTIC SP 140 is a puncture resistant, highly shock absorbent, premium surface specially engineered for indoor running-spike usage. As one of our toughest systems, Pulastic SP 140 is the preferred choice for professional and non-professional indoor track and field usage. Pulastic SP 140 can also double as an excellent multipurpose surface. The system is comprised of a 10mm shock pad combined with our GM/SP resin, providing one of the most comfortable, shock absorbent, puncture proof surfaces in the world. Pulastic SP 140 is a standard for competition track construction.

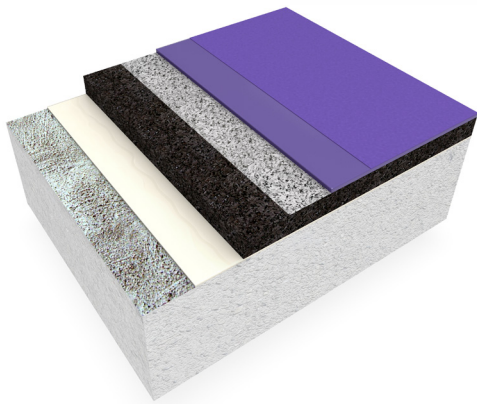

PULASTIC[®]
SPORTS FLOORING

-  Pulastic SP 140 is approved according to the EN 14904 Standard and Indoor Athletics EN 14877 Standard- Category P2
-  Approved by FIBA and IHF
-  Manufactured under ISO 9001, ISO 14001, and CSR Level 3 (ISO 26000)
-  Spike proof and outstanding resiliency for comfort and injury prevention
-  Seamless, non-porous and smooth surface for easy maintenance, repair and resurfacing options
-  Water based finish for low odor emissions during installation and maximum indoor clean air protection
-  Sustainability through high content of recycled and rapidly renewable raw materials
-  Thicker pad provides excellent contact noise reduction and thermal insulation
-  Outstanding mechanical strength and wear resistance for optimal life cycle cost and maximum usability

PROVEN
Safety

PROVEN
Performance

PROVEN
Winners

INDOOR | TRACK & FIELD | MULTI-PURPOSE | BASKETBALL | FITNESS
VOLLEYBALL | TRAINING FACILITY | COMPETITION LEVEL | ICE ARENA

Product Specifications

<i>Nominal Thickness</i>	14 mm	
<i>Character</i>	Point-Elastic	
<i>Shock Absorption</i>	45%	DIN 18032
<i>Vertical Deformation</i>	2.1 mm	EN 14809
<i>Ball Bounce</i>	98%	DIN 18032
<i>Resistance to Rolling Load</i>	0.14 mm	EN 1569
<i>Resistance to Impact</i>	≥ 800 gr @ 10°C	EN 1517
	≥ 1200 gr @ 17°C	EN 1517
<i>Resistance to Indentation</i>	0.50 mm @ 5 min	EN 1516
	0.16 mm @ 24 hrs	EN 1516
<i>V.O.C. Content- Adhesive</i>	Solvent Free	
<i>V.O.C. Content- Finish</i>	45 gr/lit	ASTM D 3960
<i>Elongation at break- Structure</i>	360%	DIN 53455
<i>Tensile Strength- Structure</i>	25 N/mm ²	DIN 53455
<i>Tear Strength- Structure</i>	52 N/mm	DIN 53515
<i>Spike Resistance</i>	1.4 Mpa	EN 14810
<i>Warranty</i>	1 year manufacturer's warranty with optional Extended Warranty Program (<i>Egis Floorlife</i>)	



16 Classic Colors to Choose From



*Custom color options available. Due to printer variation, actual floor colors may be slightly different from colors above. Consult your dealer for color accuracy.

Pulastic SP 140 Meets the Following Organizational Approvals

robbinsfloor.com | 1.800.543.1913