



Performance UltraTile®

Performance UltraTile® is designed with a patented “ultra” high-density wear layer on a molded base. This 24-by-24-by-1-inch modular tile offers enhanced impact absorption in moderate to extreme weight drop applications



MARKETS

- Fitness
- Sports
- Student Rec

APPLICATIONS

- Selectorized Strength
- Free Weights
- Cardio
- Olympic Style Lifting
- Functional Training
- Childcare / Playzones
- K-12 / Higher Education
- Outdoor

BENEFITS

- 15 year warranty
- Durable
- Sustainable
- Easy installation with Quad Blok
- Ease of maintenance
- Slip-resistant
- Custom color and logo options

PRODUCT INFORMATION

Nominal Dimensions:

Available as a standard in tiles. Talk to your local agent to determine availability, pricing, minimums, and lead times.



Tile:
1" x 24" (61cm) x 24" (61cm)



ADA Ramp:
12" (305mm) x 48" (1.22m)
Thickness: 1" (25.4mm)



Reducers:
4" (102mm) x 48" (1.22m)
Thickness: 1" / 25.4mm



Quad Blok:
1/2" H x 4 3/4" x 4 3/4"
Adhesive = 1 Tube / 15 Quad Bloks

Color Options:

[Click here to view colors](#)

THE NRG FACTOR

NRG =



50.2% Force Reduction
Absorption of impact energy



47.9% Energy Restitution
Useful return of impact energy




Safety



Ergonomics



Acoustics

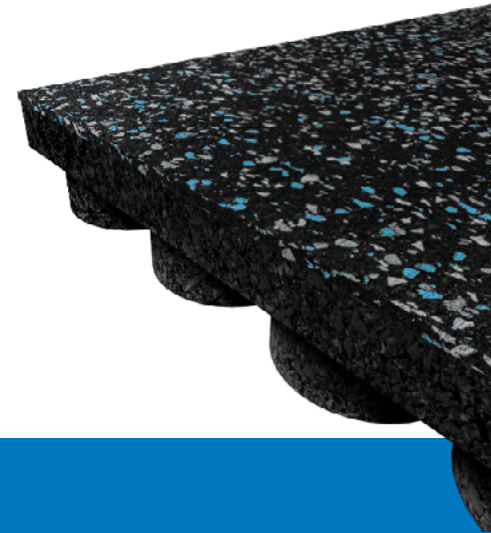

TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	0.005" (@400psi)
Coefficient of Friction	ASTM D2047	> 0.9
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	<1g, 1,000 cycles
Pill Test	ASTM D2859	Pass
Impact Insulation Class*	ASTM E492	56
Delta IIC*	ASTM E2179	27

*Tested on a 6" concrete slab with no ceiling.